


Ordering example: 4 x HG-7500-125

Order No.	S ⁽¹⁾ mm	L mm	A mm	F ₀ ⁽²⁾ daN (20°C, 150 bar)	F daN	 ⁽³⁾	kg
HG-7500-25	25	155	130		9900	No	13.6
HG-7500-38	37.5	180	142.5		10400	No	14.5
HG-7500-50	50	205	155		10600	No	15.4
HG-7500-63	62.5	230	167.5		10800	No	16.3
HG-7500-80	80	265	185	7500	11500	No	17.5
HG-7500-100	100	305	205		11200	Yes	18.9
HG-7500-125	125	355	230		11300	Yes	20.7
HG-7500-160	160	425	265		11400	Yes	23.2
HG-7500-200	200	505	305		11500	Yes	26.1

⁽¹⁾ other strokes under request







⁽²⁾ alternative forces upon request

⁽³⁾ ESK available for other strokes



Pressure medium	N ₂	Working temperature	0-80°C	Min. security stroke	10%
Max. Charging pressure	150 bar	Temperature related force increase	+0.34%/°C	Repair Kit	KIT HG-7500
Min. Charging pressure	25 bar	Max. working speed	1.6 m/s	Linkable	G1/8"


Mounting possibilities




Flange must not support spring's force

Flanges


BFE-7500




BFI-7500




GR-7500




AR-7500




XS-7500




XC-7500



PR-7500




CS-7500

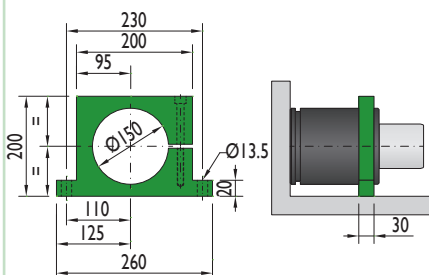

Flange must not support spring's force

CF-7500

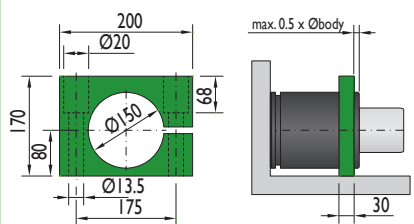

Flange must not support spring's force