

Ordering example: 4 x TS-11800-50

Order No.	S ⁽¹⁾ mm	L mm	A mm	F ₀ ⁽²⁾ daN	F daN	(3)	kg
TS-11800-10	10	100	90	11800	15500	No	4.60
TS-11800-16	16	126	110		15700	No	5.74
TS-11800-25	25	155	130		16600	No	6.48
TS-11800-32	32	187	155		16600	No	7.30
TS-11800-40	40	220	180		16600	No	8.14
TS-11800-50	50	260	210		16600	No	9.16
TS-11800-65	65	320	255		16600	No	10.14

other strokes ⁽¹⁾ under request





alternative forces ⁽²⁾ upon request

ESK ⁽³⁾ under request



Pressure medium	N ₂	Working temperature	0-80°C	Min. security stroke	10%
Max. Charging pressure	150 bar	Temperature related force increase	+0.34%/°C	Repair Kit	KIT TS-11800
Min. Charging pressure	25 bar	Max. working speed	0.5 m/s	Linkable	No



Mounting possibilities



Flanges



XT-11800

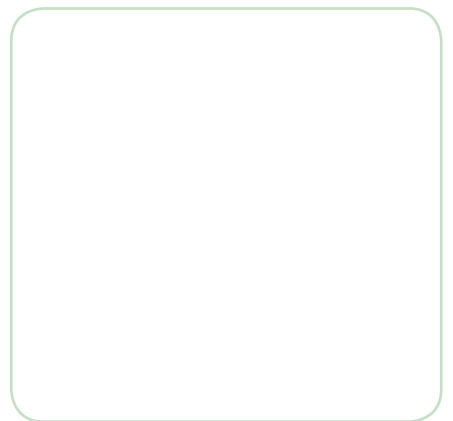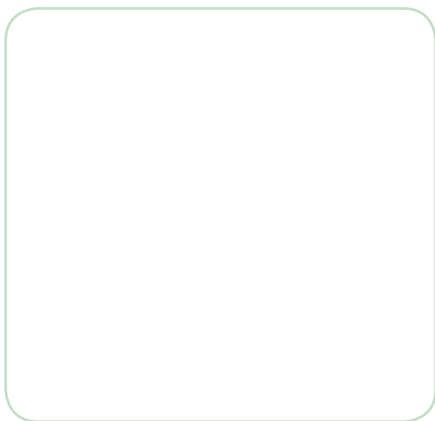

XS-5000

XC-5000

