


Force / Pressure

		daN	bar (20°C)
V	GREEN	50	45
Z	BLUE	100	90
R	RED	150	135
A	YELLOW	200	180

* maximum force if not specified

Max. strokes / minutes

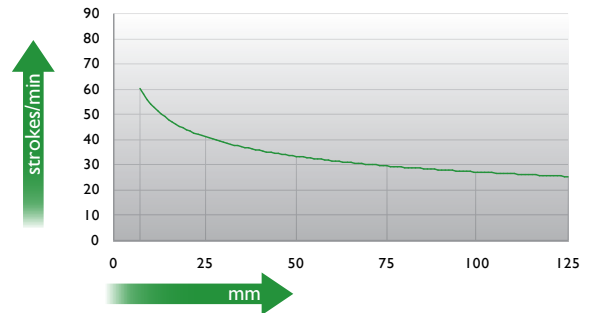

Ordering example: 4 x K-200-125 V

Order No.	S ⁽¹⁾ mm	L mm	A mm	F ₀ ⁽²⁾ daN (20°C, 180 bar)	F daN		kg
K-200-7	7	46	39	200	300	No	0.11
K-200-12	12	56	44		300	No	0.12
K-200-16	16	64	48		300	No	0.13
K-200-25	25	82	57		310	No	0.15
K-200-38	38	108	70		310	No	0.18
K-200-50	50	132	82		310	No	0.21
K-200-63	63	158	95		310	No	0.24
K-200-80	80	192	112		310	No	0.28
K-200-100	100	232	132		310	No	0.30
K-200-125	125	282	157		310	No	0.33


⁽¹⁾ other strokes under request

⁽²⁾ alternative forces upon request



Pressure medium	N ₂	Working temperature	0-80°C	Min. security stroke	10%
Max. Charging pressure	180 bar	Temperature related force increase	+0.34%/°C	Repair Kit	KIT K-200
Min. Charging pressure	25 bar	Max. working speed	1.6 m/s	Linkable	No

Mounting possibilities

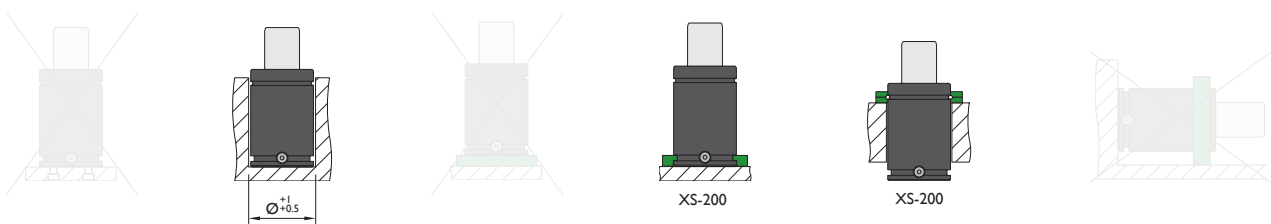

Flanges

