

Ordering example: 4 x K-570-125

Order No.	S <sup>(1)</sup> mm	L mm	A mm	F <sub>0</sub> <sup>(2)</sup> daN	F daN	kg
K-570-7	7	51	44	570	830	0.26
K-570-12	12	61	49		860	0.31
K-570-16	16	69	53		870	0.33
K-570-25	25	87	62		890	0.36
K-570-38	38	113	75		900	0.41
K-570-50	50	137	87		910	0.47
K-570-63	63	163	100		910	0.50
K-570-80	80	197	117		910	0.60
K-570-100	100	237	137		920	0.69
K-570-125	125	287	162		920	0.75


<sup>(1)</sup> other strokes under request

<sup>(2)</sup> alternative forces upon request




Pressure medium	N <sub>2</sub>	Working temperature	0-80°C	Min. security stroke	10%
Max. Charging pressure	150 bar	Temperature related force increase	+0.34%/°C	Repair Kit	KIT K-570
Min. Charging pressure	25 bar	Max. working speed	1.6 m/s	Linkable	No

### Mounting possibilities

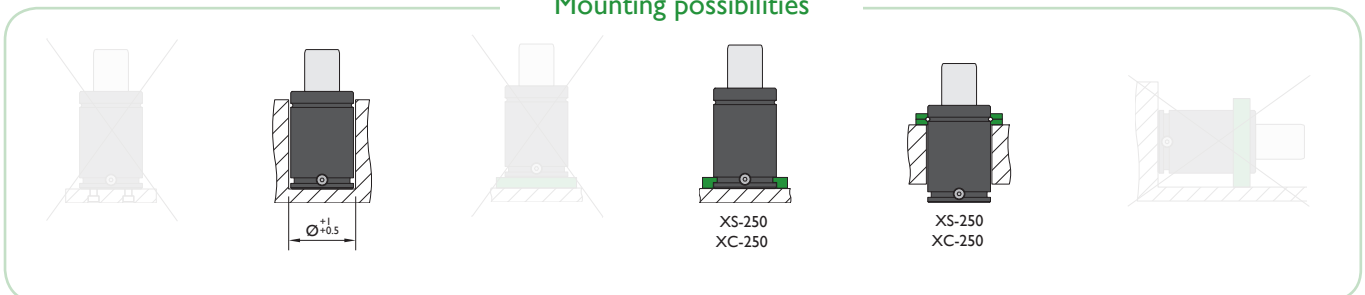


## Flanges

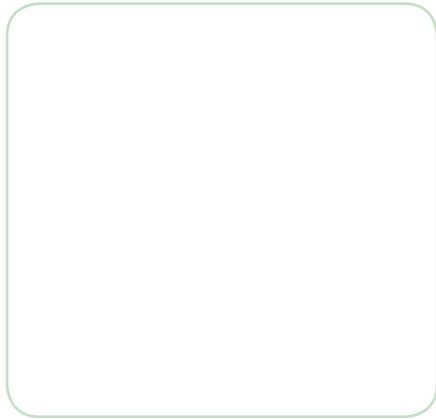

**XS-250**

**XC-250**

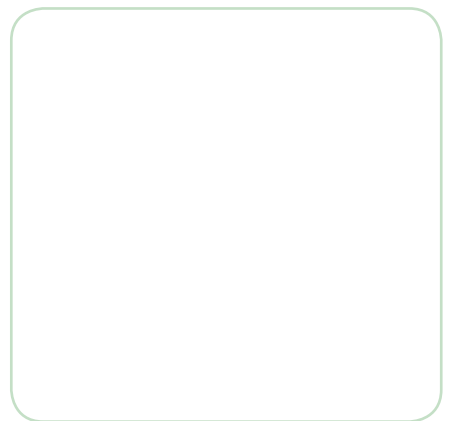

**XS-250**

**XC-250**

