

Ordering example: 4 x KC-550-125

Order No.	S ⁽¹⁾ mm	L mm	A mm	F ₀ ⁽²⁾ daN	F daN	kg
(20°C, 145 bar)						
KC-550-12	12	56	44	550	880	0.27
KC-550-25	25	82	57		890	0.31
KC-550-38	38	108	70		890	0.36
KC-550-50	50	132	82		890	0.42
KC-550-63	63	158	95		890	0.45
KC-550-80	80	192	112		890	0.51
KC-550-100	100	232	132		890	0.58
KC-550-125	125	282	157		890	0.63


⁽¹⁾ other strokes under request

⁽²⁾ alternative forces upon request



Pressure medium	N ₂	Working temperature	0-80°C	Min. security stroke	10%
Max. Charging pressure	145 bar	Temperature related force increase	+0.34%/°C	Repair Kit	KIT KC-550
Min. Charging pressure	25 bar	Max. working speed	1.6 m/s	Linkable	No

Mounting possibilities

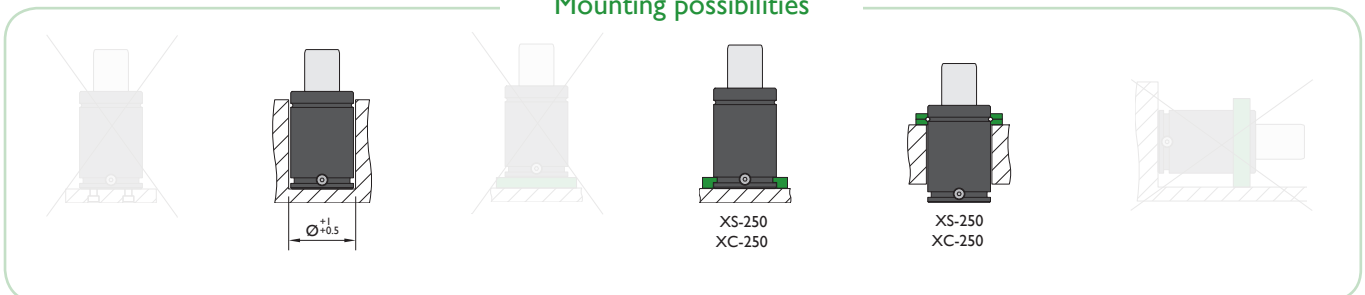

Flanges

