


Ordering example: 4 x TS-18300-50

Order No.	S ⁽¹⁾ mm	L mm	A mm	F ₀ ⁽²⁾ daN (20°C, 150 bar)	F daN		kg
TS-18300-10	10	110	100	18300	23200	No	8.66
TS-18300-16	16	136	120		23800	No	9.13
TS-18300-25	25	165	140		25200	No	10.69
TS-18300-32	32	197	165		25100	No	12.41
TS-18300-40	40	235	195		24900	No	14.46
TS-18300-50	50	270	220		25400	No	16.34
TS-18300-65	65	323	258		25900	No	18.22

other strokes ⁽¹⁾ under request




alternative forces ⁽²⁾ upon request

ESK ⁽³⁾ under request




Pressure medium	N ₂	Working temperature	0-80°C	Min. security stroke	10%
Max. Charging pressure	150 bar	Temperature related force increase	+0.34%/°C	Repair Kit	KIT TS-18300
Min. Charging pressure	25 bar	Max. working speed	0.5 m/s	Linkable	No

Mounting possibilities



XT-18300





XS-7500
XC-7500



Flanges



XT-18300

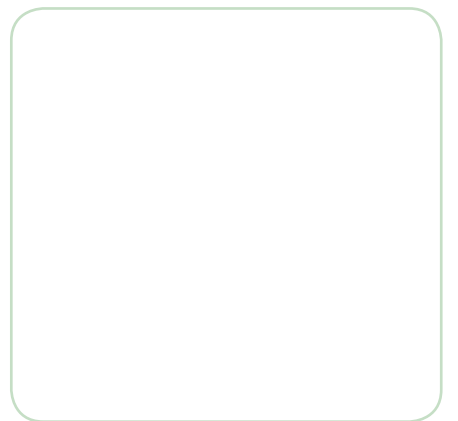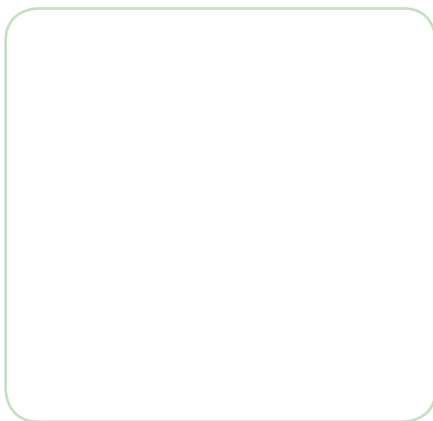

XS-7500

XC-7500

