


Ordering example: 4 x TS-4700-50

Order No.	S ⁽¹⁾ mm	L mm	A mm	F ₀ ⁽²⁾ daN (20°C, 150 bar)	F daN		kg
TS-4700-10	10	80	70	4700	6800	No	1.55
TS-4700-16	16	106	90		6800	No	1.80
TS-4700-25	25	135	110		7000	No	2.07
TS-4700-32	32	167	135		6800	No	2.38
TS-4700-40	40	200	160		6800	No	2.72
TS-4700-50	50	240	190		6800	No	3.14
TS-4700-65	65	273	208		7000	No	3.33

other strokes ⁽¹⁾ under request







alternative forces ⁽²⁾ upon request

ESK ⁽³⁾ under request




Pressure medium	N ₂	Working temperature	0-80°C	Min. security stroke	10%
Max. Charging pressure	150 bar	Temperature related force increase	+0.34%/°C	Repair Kit	KIT TS-4700
Min. Charging pressure	25 bar	Max. working speed	0.5 m/s	Linkable	No

Mounting possibilities




Flanges


BFE-1500




BFI-1500



MC-2500



XTS-4700

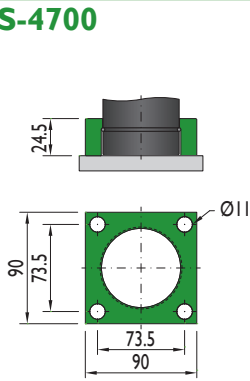

XCS-4700

