

Ordering example: 4 x TSC-18300-50

Order No.	S ⁽¹⁾ mm	L mm	A mm	F ₀ ⁽²⁾ daN	F daN	ESK ⁽³⁾	kg
TSC-18300-10	10	130	120	18300 (20°C, 150 bar)	23200	No	11.36
TSC-18300-16	16	156	140		23800	No	11.83
TSC-18300-25	25	185	160		25200	No	13.39
TSC-18300-32	32	217	185		25100	No	15.11
TSC-18300-40	40	255	215		24900	No	17.16
TSC-18300-50	50	290	240		25400	No	19.04
TSC-18300-65	65	343	278		25900	No	20.92

other strokes ⁽¹⁾ under request





alternative forces ⁽²⁾ upon request

ESK ⁽³⁾ under request




Pressure medium	N ₂	Working temperature	0-80°C	Min. security stroke	10%
Max. Charging pressure	150 bar	Temperature related force increase	+0.34%/°C	Repair Kit	KIT TSC-18300
Min. Charging pressure	25 bar	Max. working speed	0.5 m/s	Linkable	G1/8"

Mounting possibilities



GR-7500





XS-7500
XC-7500



Flanges



GR-7500

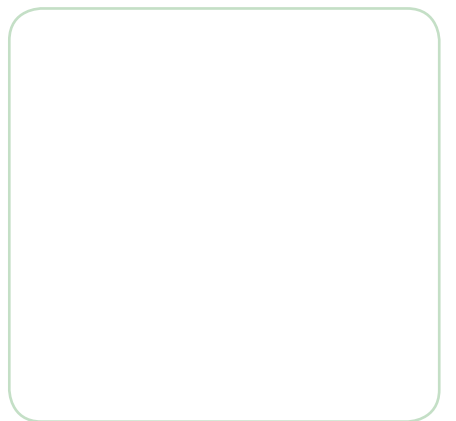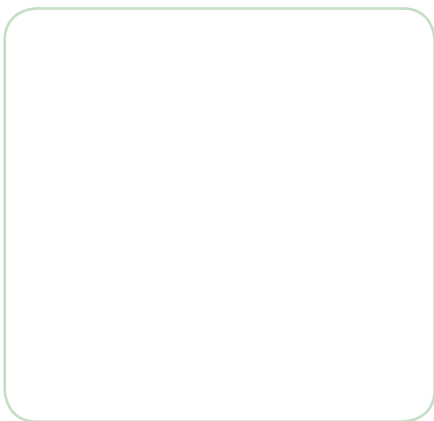

XS-7500

XC-7500

