

Ordering example: 4 x M-350-125

Order No.	S ⁽¹⁾ mm	L mm	A mm	F ₀ ⁽²⁾ daN (20°C, 140 bar)	F daN		kg
M-350-15	15	80	65	350	520	No	0.31
M-350-25	25	100	75		540	No	0.34
M-350-38	38	126	88		550	No	0.38
M-350-50	50	150	100		560	No	0.42
M-350-63	63	176	113		570	No	0.47
M-350-80	80	210	130		570	No	0.53
M-350-100	100	250	150		580	No	0.62
M-350-125	125	300	175		580	No	0.71






⁽¹⁾ other strokes under request

⁽²⁾ alternative forces upon request




Pressure medium	N ₂	Working temperature	0-80°C	Min. security stroke	10%
Max. Charging pressure	140 bar	Temperature related force increase	+0.34%/°C	Repair Kit	KIT M-350
Min. Charging pressure	25 bar	Max. working speed	1.6 m/s	Linkable	No

Mounting possibilities




Flange must not support spring's force


Flanges

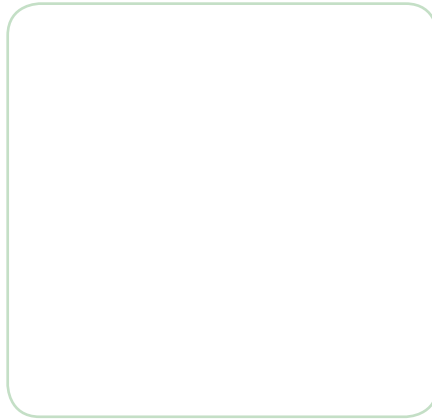


GR-300




AR-150




XS-150



XC-150




CS-150

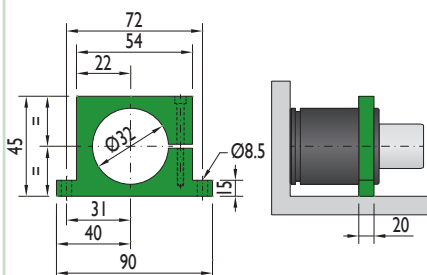

Flange must not support spring's force

CF-150

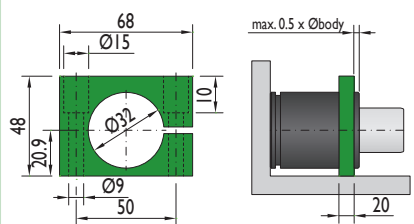

Flange must not support spring's force

